
Datasheet
Universal PEX C

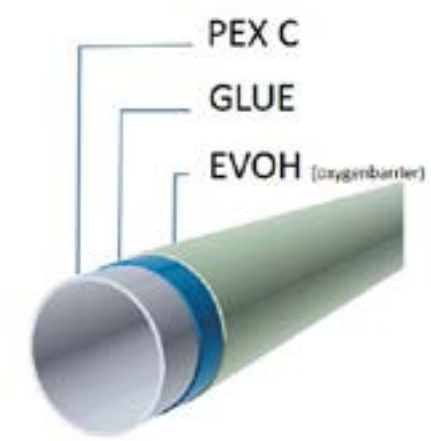

Technical data

Description:	The pipes are PEX C pipes. Assembly of the pipes should be made with fittings and bushings approved for PEX pipes.
Colour:	White
Material:	Cross-linked polyethylen
Max. operating pressure:	10 bar
Max. shortterm temperature:	95˚C
Max. continuous temperatur:	70˚C
Cross-linked:	YES - > 60 %
Oxygenbarrier:	External ISO 17455 - DIN 4726
Number of layers:	3 (PEX / glue / EVOH)
Classification:	ISO 10508 - CL 2
Product standard:	ISO 15875
Surface characteristic, dimensions, tolerances and accelerated aging test:	ISO 15875 - DIN16892/3
Migration (Toxicology, taste and smell):	KTW, ACS, W270, NSF 61
Thermal expansion:	0,14 mm/k
Thermal conductivity:	0,35 w/mk

Approvals
Universal PEX C

Finland
EUFI29-22003428-TH

Coil information

Dimension	Weight (g/m)	Coil lengths (m)	Coil I.D (mm)	Coil width (mm)	Coil O.D. (mm)
12x2,0 mm	60,60	100	420	115	635
15x2,5 mm	93,20	100	480	170	635
18x2,5 mm	117,00	100	420	175	695
22x3,0 mm	169,40	100	420	175	745

Golan Pipes Scandinavia A/S
Lollandsvej 16
DK-5500 Middelfart

Tlf. +45 6441 7732
info@golan.dk
www.golan.dk